





FemtoFiber pro

NIR

Near InfraRed

Key features

- Fiber laser system with SAM mode-locked oscillator, core-pumped high power amplifier and second harmonic generation in a single box
- Control unit with laser drivers, power PC control, communication interfaces and power supply
- Motorized prism compressor for pulse optimization
- Free-beam output for 1560 nm and 780 nm, mechanically switchable
- Secondary oscillator fiber output (FC/APC connector)
- High bandwidth monitor output (SMA connector)

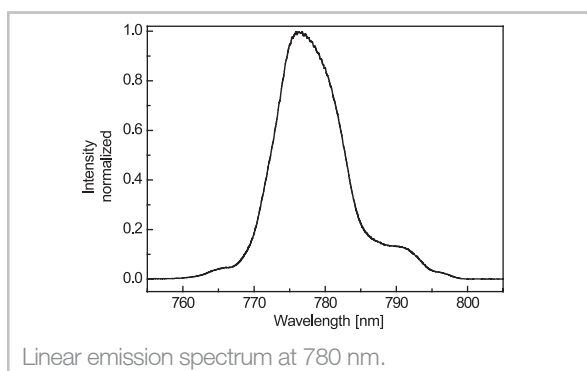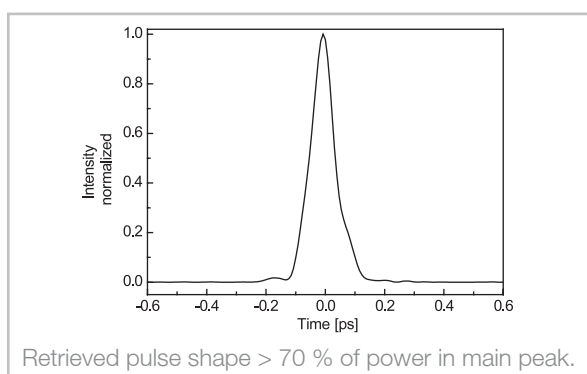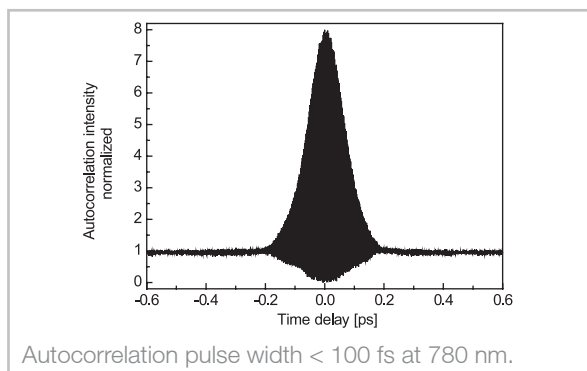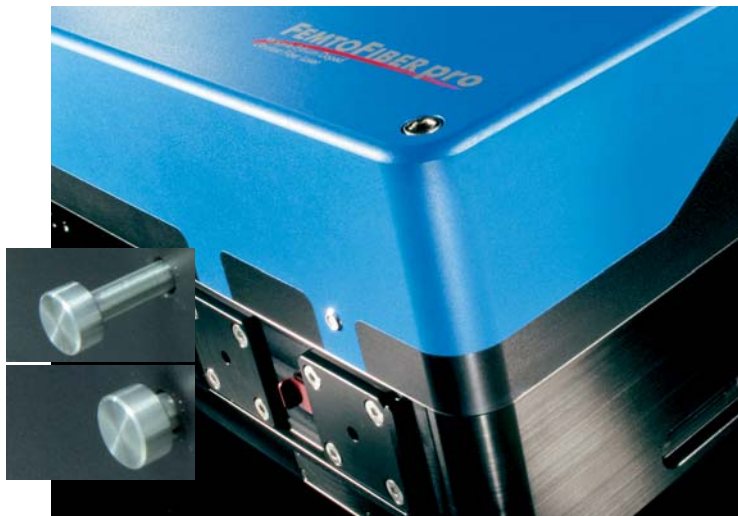

Key specifications

Fundamental wavelength	1560 nm
Laser output power	> 350 mW
Pulse width	< 100 fs
Repetition rate	80 MHz standard
Second-harmonic wavelength	780 nm
Laser output power	> 140 mW
Linear polarization	> 95 % (horizontal)
Beam shape	TEM ₀₀ , M ² < 1.2
Beam size (1/e ²)	Typ. Ø 1.2 mm (780 nm) Typ. Ø 3.5 mm (1560 nm)
Beam divergence	< 1 mrad (780 nm) < 2 mrad (1560 nm)
Output coupling	Free space
Laser head dimensions	280 x 229 x 151 mm ³ (w x d x h)
Laser head weight	< 10 kg
Control unit dimensions	235 x 315 x 140 mm ³ (w x d x h)
Control unit weight	< 4.5 kg
Line input	90 – 260 VAC, 47 – 63 Hz
PC interface	Ethernet, USB, RS 232

Options

- Repetition rate 40 MHz (M40) or customized (some specifications may change)
 - Further two oscillator outputs for seeding purposes (on total 3 FC/APC outputs)
 - System without oscillator (AMP) for multiple beam extension systems (FC/APC input)
 - Variable laser repetition rate VAR (for more information see options page)
 - Phase-locked loop laser synchronization electronics LRC (see options page)
- Contact TOPTICA for customized systems

FemtoFiber pro Control Unit

Key features


- Built-in power PC for system control
- Easy communication through web browser
- Access to motorized controls, such as variable pulse compression
- LabVIEW™ routines available for system integration
- Manual interface: Push ON/OFF button only
- Key lock switch
- Interlock capabilities
- 12 inch rack housing including interfaces, driver electronics for pump diodes and power supplies




FemtoFiber pro control unit.

The laser control unit includes a power PC that controls all laser parameters. This ensures turnkey and hands-off operation with a single ON/OFF button for the user. Standard communication interfaces (Ethernet, USB and RS 232) give access to all relevant parameters for an easy integration in complex setups.


The user can choose between three alternatives. Simplest way is to login via any web browser already installed on the user's computer. Another way is employing the LabVIEW™ routine that is included free of charge. The most sophisticated way is to use self-written scripts with a pool of pre-defined commands.

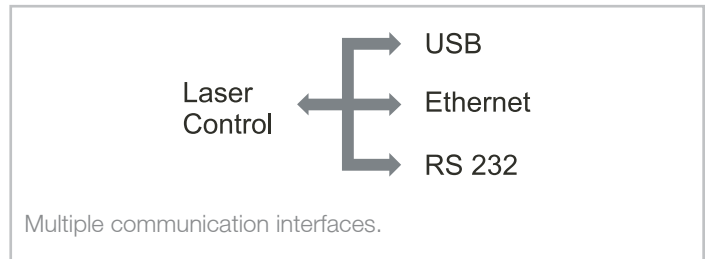

Multiple communication interfaces.

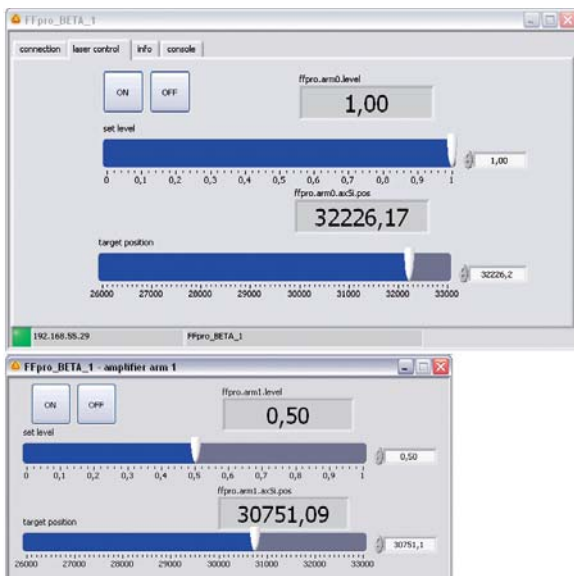

Graphical user interface based on LabVIEW™.

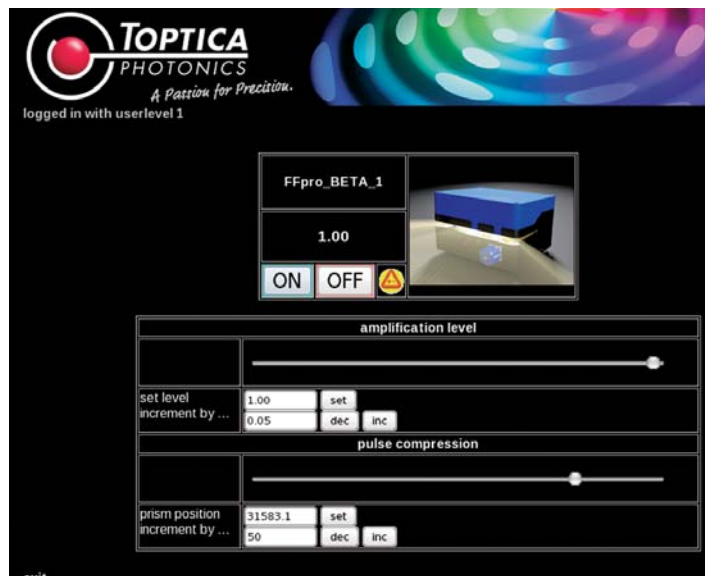

Web browser based GUI.